




PLASMA IS LIGHT



WASP PLASMA PAR


Hive Lighting's Wasp Plasma Par is the most versatile light source that can be plugged into the wall. Using a single unique plasma bulb, a micro-star, the Wasp is a Par, a Leko Spot, a Maxi, fits 4 point and eight point softboxes, photo umbrellas, traditional glass lenses and Hive's unique HDP lenses. Adjustable color temperature between 4600K - 7000K CCT, easily powered with 90-277VAC or 18-38VDC. Flicker free, 30,000 hour bulb life, vibration and impact resistant, and capable of producing output equivalent of 400 - 4,000 Watt HMIs depending on accessories. This may be the last daylight fixture you ever need.

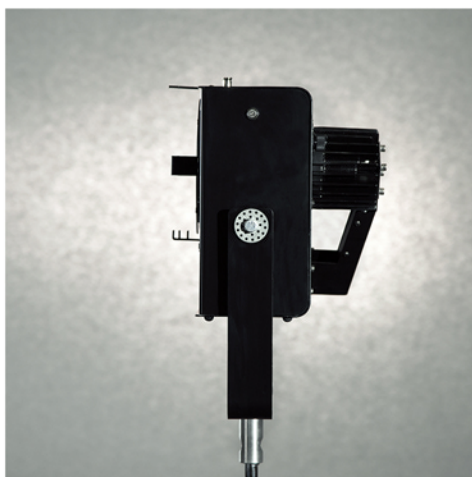

Wasp Profile



Wasp as: Drone Source 4 Kit

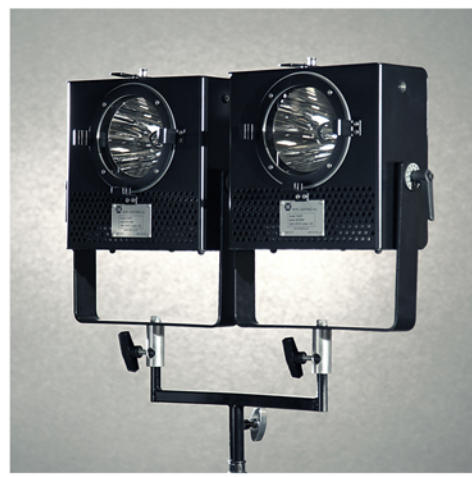

Wasp as: Killer Maxi Kit



Hive Lighting Inc. 411 S. Hewitt St. Los Angeles CA 90013
(310) 773 - 4362 www.hivelighting.com info@hivelighting.com

© 2014 Hive Lighting Inc. , Los Angeles CA



Hive Lighting Inc.

ACCESSORIES

BASIC:



Four Leaf Barndoors



"Killer" Double Header Bar



6 5/8" (170mm) Wire Diffusion



Hive Scrim Set

LENSES:



HDP Par Lenses



Hive Par Lens Set



ETC Source 4 Barrel and Lens

POWER SUPPLIES:



Hive Header Cable
(15ft ,25ft and 50ft)



Hive Power Supply



Single AC Output



Double AC Output



AC & DC Input

LIGHT MODIFIERS:



Photo Umbrella Holder



Photo Umbrella



Four Point Speed Ring



Rectangular Softbox



Eight Point Speed Ring



Octagonal Softbox



TECHNICAL SPECS

OUTPUT:

5600K CCT (Nominal daylight)

94+ CRI


Full Spectrum (see graphic)

Flicker Free (450 MHz cycle, 225 Million fps)

PHOTOMETRIC PERFORMANCE

Wasp Par - 276 Watts, 100-277 volt, 5600° CCT Plasma Quartz Bulb

Distance in Feet	Footcandles				
	10° Spot (No Lens)	10° Narrow	26° x 11° Medium	58° x 18° Wide	58° x 58° S. Wide
5	20,000	18,800	5,200	3,200	1,563
10	5,000	4,700	1,300	800	391
25	800	752	208	128	63
50	200	188	52	32	16
100	50	47	13	8	4

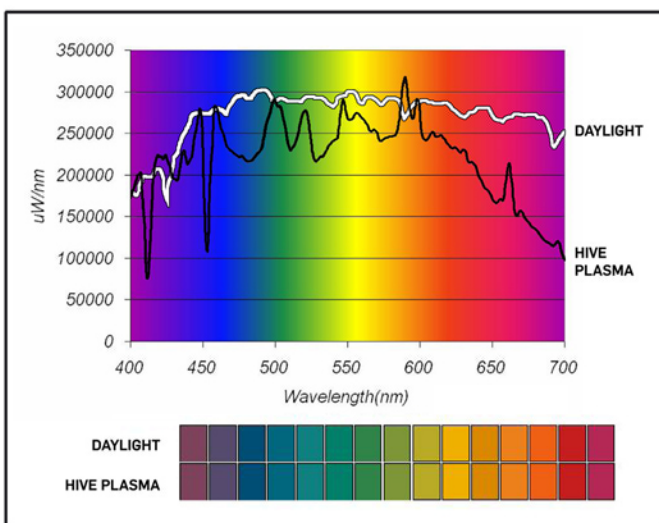

POWER:

90 – 277V AC (with Hive Lighting AC power supply)

18 – 38V DC (with Hive Lighting AC & DC power supply)

276 Total System Watts

2.3 Amps (120ACV) / 9.8 Amps (28DCV)

DIMENSIONS:

11.5 lbs (5.2 kg)

10.5" x 9.8" x 11" (266mm x 248mm x 280mm)

14.5" (368mm) from pin receiver to yoke mount

"Baby" (16mm) TVMP receiver

6-5/8" or 6 1/2" (170 mm or 165mm) sized accessories

OPERATING:

Daylight Dial 4600K - 7000K (Plus Moonlight EFX)

DMX512 (optional)

30,000 Hour Hive Recommend Bulb Life (50,000 hours L70)

Minimum Recommended Ambient Temp: - 31F (- 35C)

Maximum Recommended Ambient Temp: 110F (43C)

Max Operating Altitude 30,000 ft. (9,144 m)

Hive Lighting Inc. 411 S. Hewitt St. Los Angeles CA 90013
(310) 773 - 4362 www.hivelighting.com info@hivelighting.com

© 2014 Hive Lighting Inc. , Los Angeles CA



Hive Lighting Inc.