
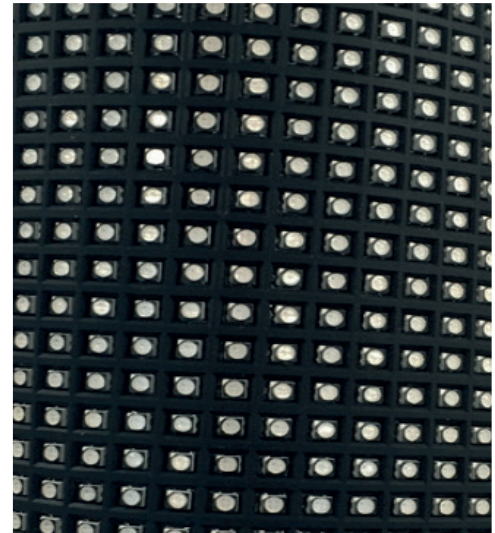


6mm Flex LED

GENERAL SPECIFICATION

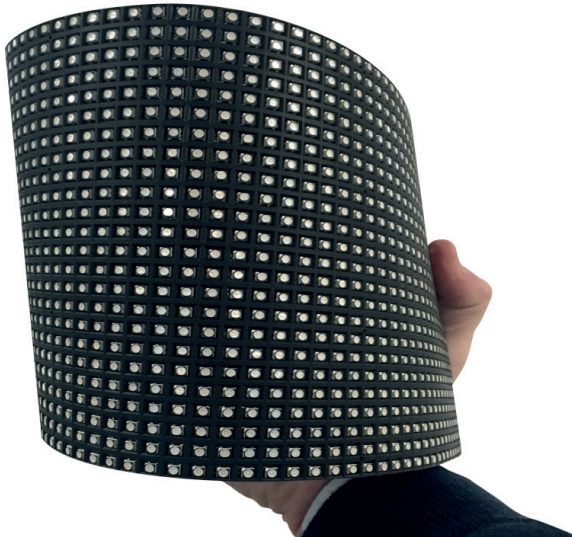

Pixel Pitch	6 mm
LED Type/Brand	SMD3528 (3 in 1)
Brightness (nits)	1200
Module Size (mm)	288mm x 144mm
Module Area (sqm)	0.041
Pixel/Module	48 x 24
Pixel/M ²	27,777
Viewing Angle (H/V)	140/140
Controller	NovaStar
Weight/Module	0.39kg
Color Depth	14bit
Processing	1920 x 1080
IP rating	Indoor
Scan	Constant Current
Refresh Rate	1200 Hz
Max Power/sqm	440 W
Working Temp	0°~40°

KEY FEATURES

▪ FLEXIBLE PANELS

The new FLEXI LED is built of modular flexi tiles, with hold together in a magnetic mechanism, allowing you to create fully curved formations.

▪ HIGH RESOLUTION

With a pixel pitch of just 6mm, the FLEXI LED is able to retain sharp clarity, even when visitors are located in close proximity to the screen. Able to display HD and ultra-HD content, which delivers high contrast and incredibly dense black levels.

▪ WIDE VIEWING ANGLES

This screen also has wide viewing angle, which allows viewing of the screen from acute angles without any shadow and has a variable refresh rate of 1200 Hertz.

▪ SUPER LIGHTWEIGHT

Each panel weighs such 0.39kg ensuring a simple and lightweight setup in a stand design or event of any shape or size.

ORDER WITH US TODAY

P: +44 (0) 1279 624 840 E: europa@4wall.com W: www.4wall.com

VIDEO | LIGHTING | RIGGING