



PRISMA WASH 25

SPECIFICATIONS / TECHNICAL DATA REV A

KEY FEATURES

- IP65 Rated exterior high power UV wash luminaire
- 20 degree narrow beam angle
- 365nm peak true UV wavelength
- Zero visible light output
- IP rated power and data In/Out pigtail cables attached
- Optional black glass diffusion filter

SPECIFICATIONS

Dynamic Effects

- . 20° Beam Angle
- . Variable Dimming Curve Modes
- . High Speed Electronic Strobe
- . LCD Display
- . (38) 2W High Power UV Diode Led's
- . 20,000 Hour Average Led Life
- . Beam Uniformity

Control

- . DMX Modes: 3
- . DMX Channels: 2, 3, and 6
- . RDM (Remote DMX) Protocol Support
- . Art-Net Protocol Support
- . Primary/Secondary Modes
- . Onboard 4 Button Touch Control Panel

Connections

- . Data Connectors: 5-pin XLR In/Out
- . Locking Power Connector

Construction / Physical / Performance

- . Dimensions (LxWxH): 17.51 x 5.90 x 11.29 in. / 445 x 150 x 287mm
- . Weight: 19lbs. / 8.62 kg



MAGMATIC



PRISMA WASH 25

SPECIFICATIONS / TECHNICAL DATA REV A

Electrical

- . Input Voltage: AC 100-240V, 50/60Hz
- . Amperage: 110v/0.77A, 240V/0.38A
- . Power Consumption: 83W
- . Fuse: T2A/250V

Certifications / Qualifications / Thermal




- . IP Rating: IP65 Rating
- . Approvals: ROHS, CE Approved, ETL Approved
- . Cooling: Air Cooled
- . Maximum Temperature (Ambient): 113° F (45° C)
- . Minimum Temperature (Ambient): 14° F (-10° C)

What's Included

- . 14 AWG Twist Locking Power Cable

Optional Accessories

- . Prisma Wash Black Glass (PSG800)

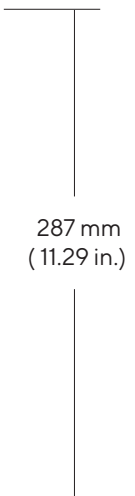

MAGMATIC