


ROE

MC-7H 7.5mm



GENERAL SPECIFICATION

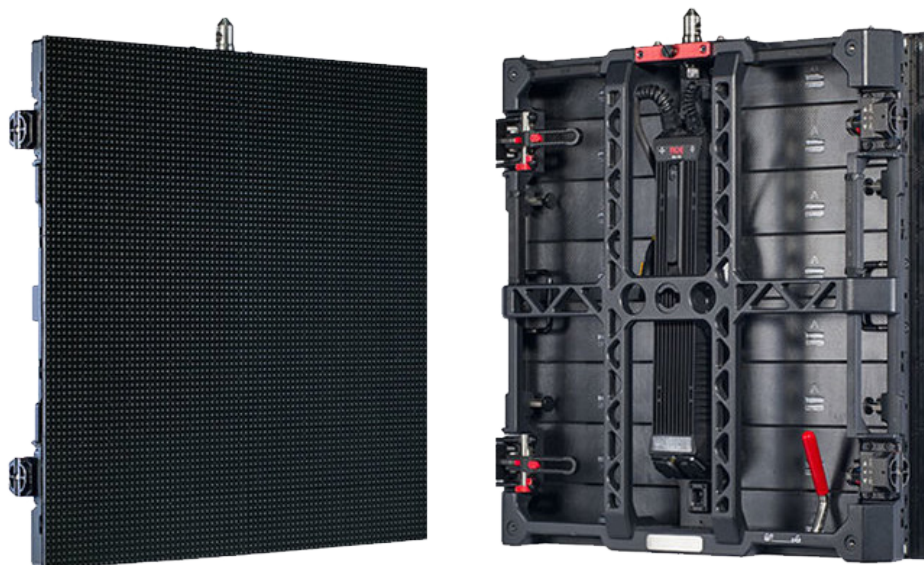

Pixel Pitch	7.5 mm
LED type	3 in 1 SMD
Resolution	80 x 80
Brightness	6000 cd/m ²
Refresh Rate	>2000 Hz
Module dimensions	600 x 600 x 85 mm
Weight per panel	14.8 kg
Power consumption / unit	400 W
Min. viewing distance	7.5 m
Horizontal viewing angle	>110°
Vertical viewing angle	>100°

KEY FEATURES

- ULTRA LIGHTWEIGHT

The lightweight ROE MC-7H is an optimal LED panel for indoor/outdoor use with black waterproof LEDs, making it an exceptional LED solution for outdoor stages.

- EXTREME FLEXIBILITY

The ROE MC-7H was designed with multiple angle folding, mix-and-match capability and hollow spacing to allow for flexible, creative design.

- FAST AND EASY INSTALLATION

The panels come paired with a specially designed climbable, robust touring frame which features a fast locking system making them ideal for the rental and touring market.

- COLOUR CALIBRATION SYSTEM

The MC-7H delivers incredible image quality. This is due to the panels' small pixel pitch, high refresh rate and exceptional contrast. It's pixel by pixel 16bit colour calibration system ensures image uniformity, whilst its latest 2727 SMDs allow for higher contrast when compared to its competition.

ORDER WITH US TODAY

P: +44 (0) 1279 624 840 E: info@4wall.com W: www.4wall.com


VIDEO | LIGHTING

Unilumin

UpadIV



CAD Drawings

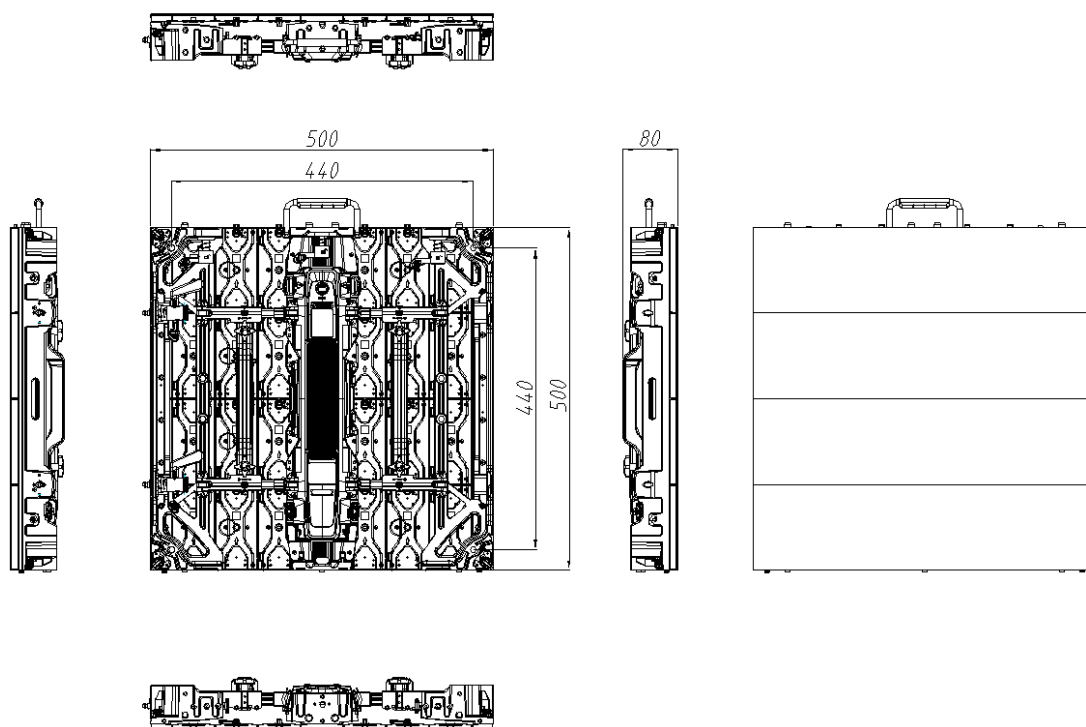

ORDER WITH US TODAY

P: +44 (0) 1279 624 840 E: info@4wall.com W: www.4wall.com

VIDEO | LIGHTING