



## MavX Features

Optimized output for film, video and still photography
Small and lightweight with easily removable yoke
Weather Resistant
Output similar to traditional 1K softlight
Utilizes CineoColor™ custom LED's for accurate, consistent output
Color-accurate CCT adjustment from 2700K to 6500K, with presets at 3200K, 4300K and 5600K
150°light spread
Silent, passive cooling (no fans) and completely flicker-free operation
Rotary on-board dimming, with presets calibrated in camera stops
5-pin wired DMX control for both dimming and CCT adjustment
Built-in LumenRadio™ wireless DMX control included
80/20 T-Slot mounting slots for maximum flexibility
Accessories include AC adapter, V-Lock battery adapter, Anton Bauer battery adapter, barn doors, grids, louvers, and soft boxes

The award-winning Cineo Maverick™ mid-power softlight is now available in a color-tunable version: The Cineo MavX. It provides all of the color rendering and output benefits of our Remote Phosphor Technology, while offering the ability to dynamically color tune from 2700K to 6500K. MavX includes several updated features, making it the perfect lighting tool for small studio and portable applications. Compact, powerful, and exceptionally durable, the MavX delivers a volume of light equal to a traditional 1K soft source with no color shift or flicker at any output level. Like all other Cineo Lighting fixtures, MavX uses passive thermal management for completely silent operation. The MavX supports Cineo's Photo-Accurate Dimming, which matches the dimming curve to the camera stops. Local control is simple and intuitive, complimented by both wired and wireless DMX control built-in.

For studio applications, MavX delivers up to 8,000 lumens from a lightweight, compact package: perfect for lighting broad areas where grid height is challenging. A wide range of accessories are available, including barn doors, louvers, and softboxes for accurate lighting control. MavX is also ideal as a portable, battery-powered soft source. Cineo's patented SmartPower™ technology provides consistent light output during battery operation regardless of the charge state of the battery. It also protects the battery by providing adjustment to the fixture's current draw to match the output capability of your batteries.


Extremely accurate color rendering is achieved with Cineo-developed LED phosphor formulations. Additionally, the MavX is color-tunable from 2,700K to 6500K, with accurate presets at 3200K, 4300K and 5600K.

The Cineo MavX is the smart soft lighting choice designed to fit nearly every installation or production budget.



## MavX Specifications

<b>Size</b>	9.5" w x 8.5" h x 3.25" d (241mm w x 216mm h x 83 mm d)
<b>Power</b>	10.5-28 VDC input; 75, 120, 135 watts user configurable
<b>Weight</b>	5 lbs. (2.3 kg)
<b>Output</b>	Up to 8,000 lumens
<b>4-pin XLR power input</b>	
<b>Lamp Life: 50,000 hours, L70 rated</b>	
<b>Environmental Temperature Range: -20°C - +40°C</b>	
<b>Max. temperature rise: +45°C</b>	
<b>ETL, cETL, CE &amp; RoHS compliant</b>	
<b>Zero UV Light Emitted</b>	
<b>Made in USA</b>	


## SmartPower Control During Battery Operation

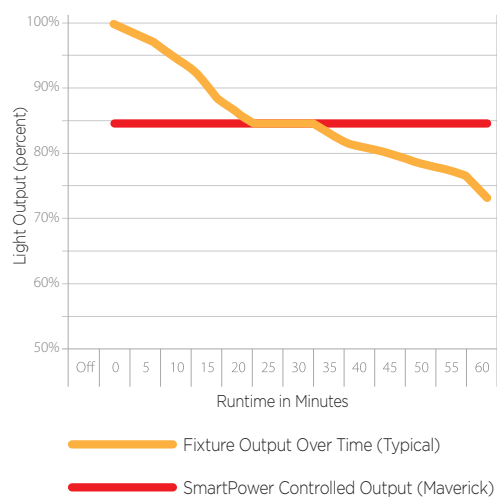

## Color Quality

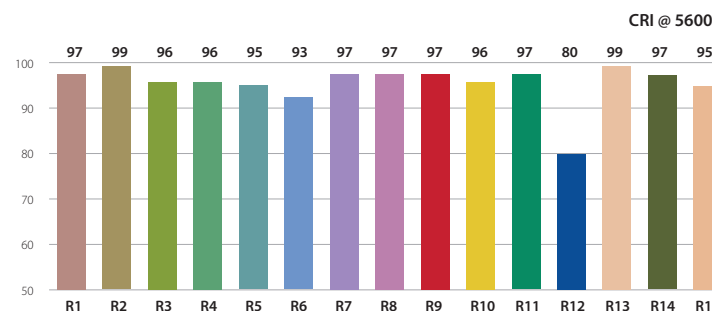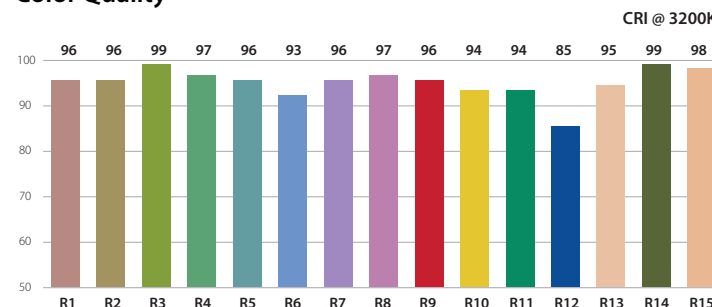

## CIE Color Space



## Light Output

CCT	Foot-candles @ 10ft.	Lux @ 3m.
2700	22	324
3200	30	346
4300	35	367
5600	28	378
6500	27	356

Specifications are subject to change without notice. Cineo Lighting and MavX are registered trademarks of Universal City Studios, LLC. ©2019 Cineo Lighting v08.08.19

**SALES**

**818.777.1825**  
**cineolighting.com**

**RENTALS**

**818.684.0935**  
**universalstudioslot.com**