


Specifications

Vanish Solid Touring	V4ST	V6ST
Pixel Pitch	4.6mm	6.94mm
Max Brightness Calibrated	5000nits	5000nits
Panel Dimension without support frame	1000mm x 1000mm x 116mm 39.4" x 39.4" x 4.57"	1000mm x 1000mm x 116mm 39.4" x 39.4" x 4.57"
Panel Dimension with support frame close	1000mm x 1000mm x 150mm 39.4" x 39.4" x 5.91"	1000mm x 1000mm x 150mm 39.4" x 39.4" x 5.91"
Panel Dimension with support frame open	1000mm x 1000mm x 450mm 39.4" x 39.4" x 17.72"	1000mm x 1000mm x 450mm 39.4" x 39.4" x 17.72"
Panel Resolution (H x V)	216 x 216	144 x 144
Weight Per Panel (without ladder)	27.5kg; 60.63lbs	27.3kg; 60.19lbs
Weight Per Panel (with ladder)	34.5kg; 76.06lbs	34.3kg; 75.62lbs
Power Consumption Max / Average	700W / 350W	700W / 350W
BTU Max / Average	2390 / 1100	2390 / 1100
Transparency	Solid	Solid
Serviceability	Rear	Rear
Curving (Concave & Convex)	Concave 10°-Convex 10°(optional)	Concave 10°-Convex 10°(optional)
LED Configuration	SMD 1921 Black	SMD 1921 Black
Viewing Angle Horizontal	160°	160°
Viewing Angle Vertical	120°	120°
Scan Ratio	1/6	1/4
Refresh Rate	3840Hz	3840Hz
Gray Scale	16bit	16bit
Frame Material	Magnesium Alloy	Magnesium Alloy
Processing Platform	Brompton / Megapixel / Evision	Brompton / Megapixel / Evision
Operational Temp / Humidity	-20°~45°C, 10~90%RH -4°~113°F, 10~90%RH	-20°~45°C, 10~90%RH -4°~113°F, 10~90%RH
Storage Temp / Humidity	-40°~60°C, 10~90%RH -40°~140°F, 10~90%RH	-40°~60°C, 10~90%RH -40°~140°F, 10~90%RH
IP Rating	Outdoor	Outdoor
Certifications	CE, ETL, FCC, UKCA	CE, ETL, FCC, UKCA

*Note: The Specifications are for reference, actual values may vary.

Dimensions

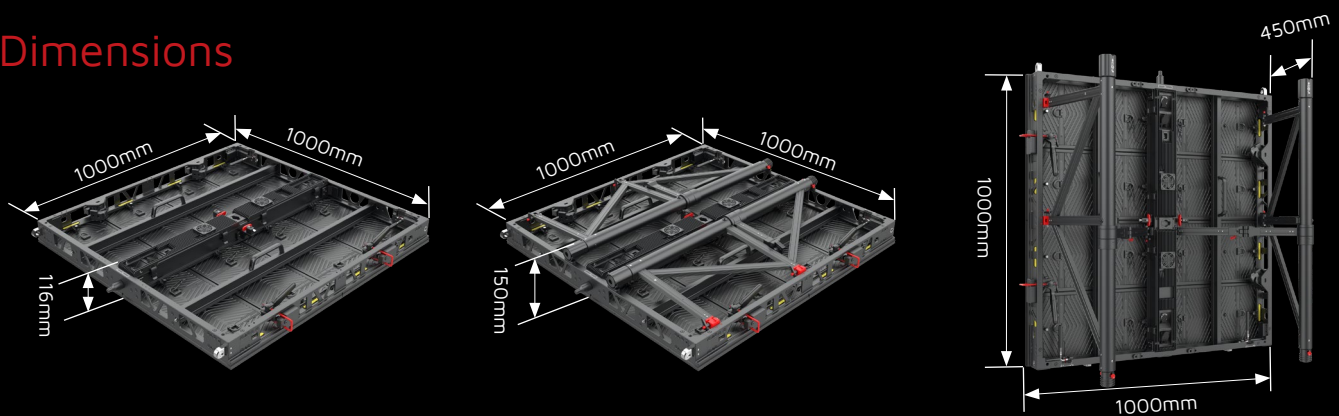

www.roevisual.com

ROE China | ROE US | ROE EU | ROE UK | ROE JP | ROE ME | ROE AUS
roe@roevisual.com