

EX 3 specs



Bring pixel-perfect experiences to life

EX 3 is a video playback and pixel-perfect mapping solution designed specifically for location-based experiences and fixed installations.

Warranties & Support

- 2 year return to base hardware warranty

Bundled accessories

- Slide Rail Kit
- Rack Handles
- Hardware Guide
- Power Cable (Plug - IEC) x2:
 - USA
 - EU
 - UK

Upgrades


(AS - At Sale, RTM - Return To Manufacturer)

- Storage Upgrade 7.68TB ^{AS, RTM}
- Storage Upgrade 15.35TB ^{AS, RTM}
- Storage Upgrade 30TB ^{AS, RTM}

Physical specifications

Packed Dimensions:	W	H	D
	635mm 25"	325mm 12.8"	975mm 38.39"
Unit Dimensions:	W	H	D
	438.5mm 17.26"	88.5mm 3.42"	788.8mm 31.06"
Unit + Rack Handles	W	D	
	483.5mm 19.03"	821.8mm 32.35"	
Rack Depth with Slides:			D
			914.6mm 36.01"
Unit Weight:			
			20.5kg 45.2lbs
Packed Unit Weight:			
			35kg 77.16lbs

EX 3 specs

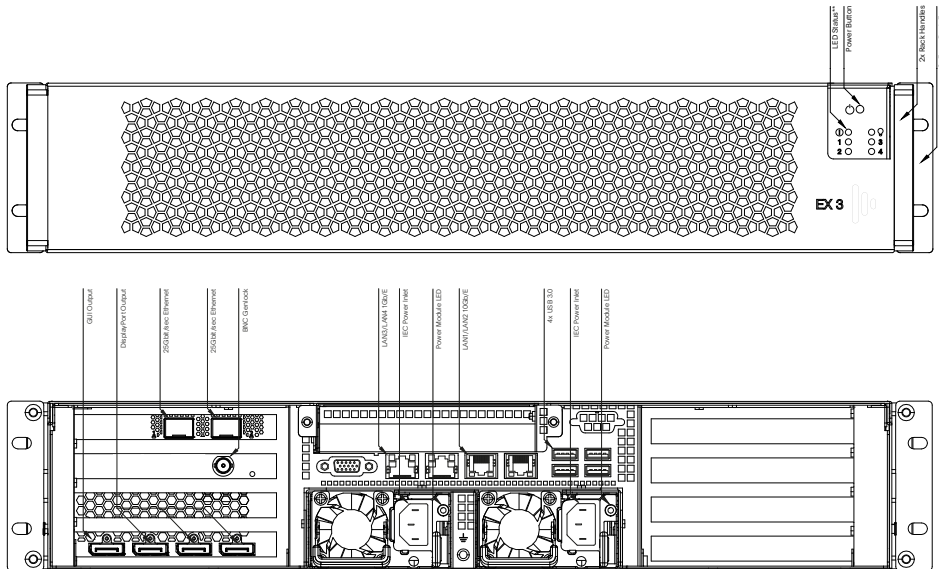

Hardware specifications

Voltage: 100-240VAC,
50-60Hz*

Power Connection: IEC

Power Consumption: 485W

Heat Dissipation Peak: 2,388
BTU/hr

Max decibel rating: 66dB**

Environmental Tolerances:

Temperature: 5-30°C
(40°-86°F)

Humidity: 20%-80%
(non-condensing)

Altitude: 0-8850 ft (0-2700m)

Operating System:

Windows®
10 IoT Enterprise SAC

OS: 1× 2TB SSD

Storage: 1× 3.84TB SSD (default)

Mounting System:

2U 19" rack mount

System connectivity I/O

Video Output:

1× DisplayPort 1.4 (GUI)

3× DisplayPort 1.4

General Network:

2× 1Gb/sec Ethernet

2× 10Gb/sec Ethernet

High Speed Network:

2× 25Gb/sec SFP28

Data/Peripherals:

4× USB 3.0

Video Sync:

1× BNC Genlock

* for countries with variable power supply we recommend a UPS to provide a consistent voltage

** testing has not been completed through official lab testing