



Take live events to the next frontier

The gx 3 is the new go-to media server for touring artists who want to run the most intricate set designs.

Warranties & Support

- 2 year return to base hardware warranty

Bundled accessories

- Keyboard
- Mouse
- Power Cable (Plug-True1)
- Hardware Guide

Optional accessories

- Rack slides

Upgrades

(AS - At Sale, F - Field)

- Storage Upgrade 7.68TB ^{AS, F}
- Storage Upgrade 15.35TB ^{AS, F}



Software

- Notch Playback Licence (2 years)

Physical specifications

Packed Dimensions:	W	H	D
	711mm 28"	508mm 20"	737mm 29"
Unit Dimensions:	W	H	D
	445mm 17.52"	178mm 7"	593mm 23.35"
Unit + Rack Handles	W	D	
	483mm 19"	621mm 24.45"	
Rack Depth:			D 585mm 23.03"
Unit Weight:		14.4 kg 31.75 lbs	
Packed Unit Weight:		20.46 kg 45.1 lbs	

gx 3 specs

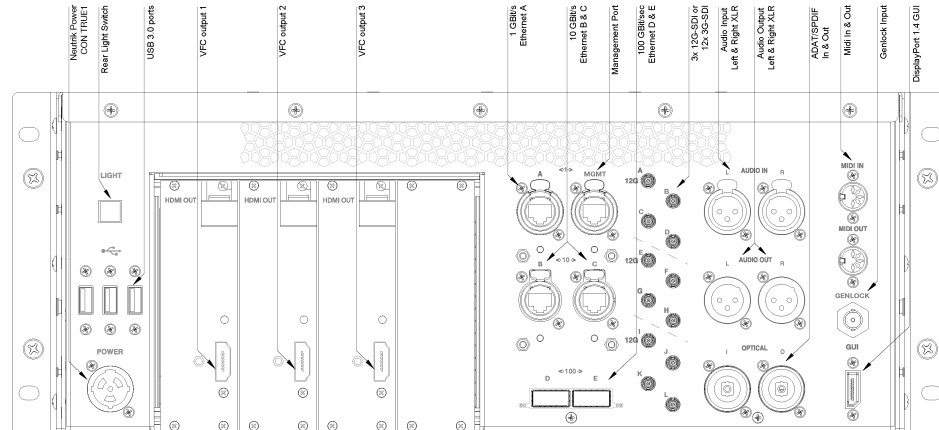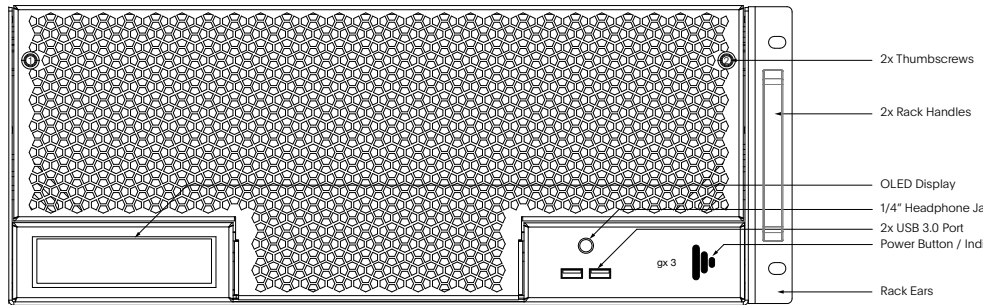

Hardware specifications

Voltage: 100-240V, 50-60Hz

Power Connection: Neutrik powerCON True1

Power Consumption Peak: 700 W

Heat Dissipation Peak: 2,388 BTU/hr

Max decibel rating: 56dB

Environmental Tolerances:

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-2700m (0-8850 ft)

Operating System: Windows 10

Enterprise SAC

OS: 2x 256GB SSD

Storage:

3.84TB SSD (default)

System connectivity I/O

Video Output:

1x DisplayPort 1.4 (GUI)

3x VFC Output Slots

Ships standard with HDMI 2.0

VFC cards

Audio:

Balanced XLR (circular 3-pin connector) - 2x in, 2x out

Analogue (1/4 headphone jack) - 1x in

Optical Audio:

ADAT/SPDIF (Toslink connector) - 1x in, 1x out

MIDI:

MIDI (circular 5-pin DIN connector) - 1x in, 1x out

Different Video Format

Conversion Cards also

available, refer to VFC

specifications

Video Input:

3x 12G inputs or 12x 3G

inputs

(HD-BNC connectors)

General Network:

1x 1Gb/sec Ethernet

2x 10Gb/sec Ethernet

High Speed Network:

2x 100Gb/sec Ethernet

System Management

Controller:

1x Management Port (Ethernet)

Data/Peripherals:

5x USB 3.0

Video Sync:

1x BNC Genlock