

gx 2c specs



think fast.

To match the ever increasing creative demands, and technological advances disguise have launched the new gx 2c media server, featuring even more GPU processing power, more capture, more storage, as well as 10-bit and HDR support.

Warranties & Support

- 2 year return to base hardware warranty (plus options to extend warranty length)

Bundled accessories

Keyboard, Mouse & Pad, Power Cable (Plug-True1), Power Daisy Chain (True1-True1), Active DP to DVI adapter, Getting Started Guide + Manual, Backmounted Rails.


Software

- disguise full production suite
- Notch Playback License (2 years)

Physical specifications

Packed Dimensions:	W 711mm 28"	H 508mm 20"	D 737mm 29"
Unit Dimensions:	W 445mm 17.52"	H 178mm 7"	D 593mm 23.35"
Unit + Rack Handles	W 483mm 19"		D 621mm 24.45"
Rack Depth:			D 585mm 23.03"
Unit Weight:		EST. 16.8kg	37lbs
Packed Unit Weight:		EST. 24.9kg	54.9lbs

gx 2c specs

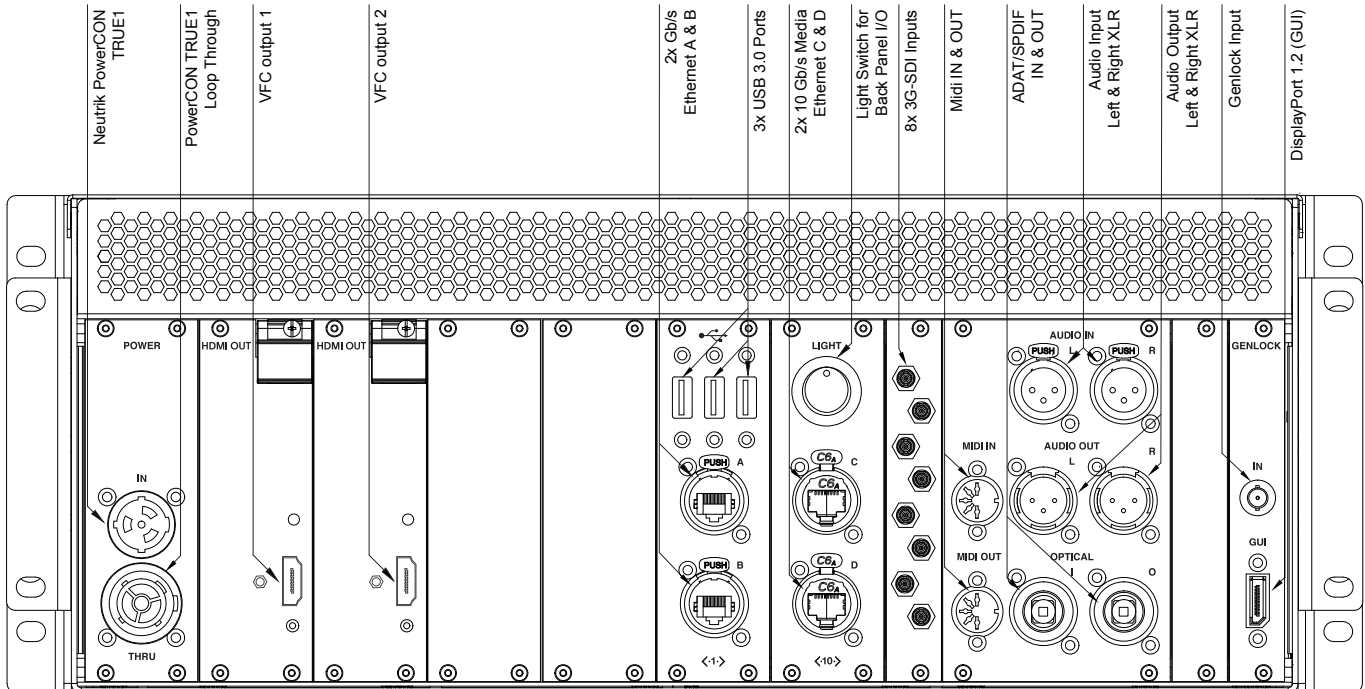

Hardware specifications

Voltage: 100-240V, 50-60Hz

Power Consumption:

720VA @ 240V, 50Hz (max)

Operating System:

Windows Enterprise SAC

CPU: Intel® Xeon® Quad-Core 3.7Ghz

Memory: 64GB DDR4 RAM

Environmental Tolerances:

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

Mounting System:

4U 19" rack mount

Audio: RME Professional

OS: 2× 80GB SSD

(Internal System Drive, Restore Drive)

Storage: 4TB SSD

System connectivity I/O

Video Output:

1× DisplayPort 1.2 (GUI)

2× VFC Output Slots

Ships standard with HDMI 2.0 VFC cards

Different Video Format Conversions cards also available, refer to VFC Specifications

Video Input:

8× 3G-SDI or 2× 2160p (Quad Split)
(HD-BNC connectors)

Analogue Audio:

2× Balanced XLR Output

2× Balanced XLR Input

1× 1/4" Headphones Jack

Digital Audio: ADAT/SPDIF I/O

MIDI: 1× In, 1× Out

General Network: 1× Gigabit LAN

Artnet: 1× Gigabit LAN

Media Network: 2× 10Gb/sec LAN

Data/Peripherals:

5× USB 3.0

Video Sync: BNC Genlock