


FreeStyle Air

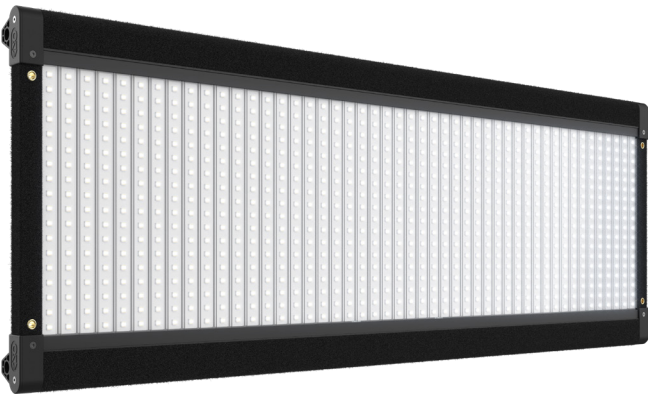

Photometrics

6500 Kelvin												
Feet	2	4	6	8	10	12	14	16	18	20		
Foot Candles	663	212	98	56	37	26	19	15	12	10		
Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6
Lux	9920	3270	1540	895	578	406	303	234	188	152	128	110

Specifications

Fixture Specifications

- Kelvin Range: 2500~9900
- Dimming Range: 100%~1%
- IP Rating: IP20
- Dimensions: 39.5 x 2 x 13" (100 x 5 x 33cm)
- Weight: 5 lb (2Kg)

Controller Specifications

- Controller: LED-140X
- Input Voltage VAC: 100~240VAC, 50/60Hz, 100W
- Amps VAC: 1.25A at 120VAC, 0.65A at 230VAC
- Input Voltage VDC: 18~36VDC, 150W
- Amps VDC: 6.25A at 24VDC
- Kelvin Range: 2500~9900
- Dimming Range: 100%~1%
- Dimensions: 9.5 x 7.5 x 2.5" (24 x 19 x 6.5cm)
- Weight: 4.5 lb (2Kg)

Accessories

- PAN-AIR – FreeStyle Air Panel w/ Harness
- LED-140X-120U – FreeStyle 140 LED DMX Controller, Univ 120U
- LED-140X-230U – FreeStyle 140 LED DMX Controller, Univ 230U
- MTP-BG41S – KinoGrip 41K Mount w/ Baby Receiver Short (16mm)
- X12-F425 – FreeStyle/4 Extension, 25ft

The FreeStyle Air arrives ready to take its place as a lightweight accessory that integrates seamlessly with existing FreeStyle systems. Compatible with FreeStyle mounts, extension cables and LED-140 & LED-150 Series controllers, this portable thin profile panel offers the advantages of easy deployment and favorable cost of ownership to current FreeStyle owners and operators.

In addition to a twist-on mount for light stands, and corner bumpers for 4-point hangs, the FreeStyle Air comes with eyelets to simplify overhead and other surface attachment. Its rigid construction prevents any flex when handling and safeguards the integrity of its components. Usable LED life is extended with a proven passively-cooled design that ensures color and luminosity remain stable over the rated life of the LEDs.

Ease of maintenance is built into a user serviceable design. It features a removable upper rail and quick access to pull-out LED platens that are easily replaced or repaired. Combining new mobility and reliable performance with familiar features, the FreeStyle Air delivers Kino Flo’s renowned Color Science LED technology in this lightweight addition to the range.

Features

- Kelvin presets & custom settings, 2500K-9900K
- Dimming without color shift
- Green/Magenta control
- Dial in any color through Hue Angle and Saturation control
- Kino Flo presets and Gels
- RGB, CIE xy, FX (Effects) control
- Camera Profiles (LUTs), Color Space
- Manual & DMX Dimming, DMX wireless (Lumen Radio)

