

USER MANUAL

NANLUX


INNOVATE · ILLUMINATE

FL-35E *Motorized Fresnel Lens 15°-46°*

WWW.NANLUX.COM


FL-35E *Motorized Fresnel Lens 15°-46°*

■ Product Diagram

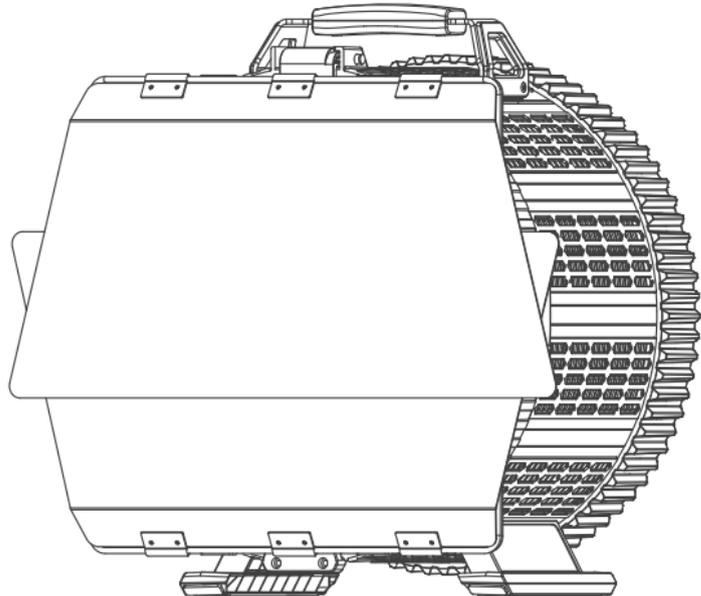

Note: FL-35E is compatible with NL mount lighting fixtures that with electronic contacts.


Usage

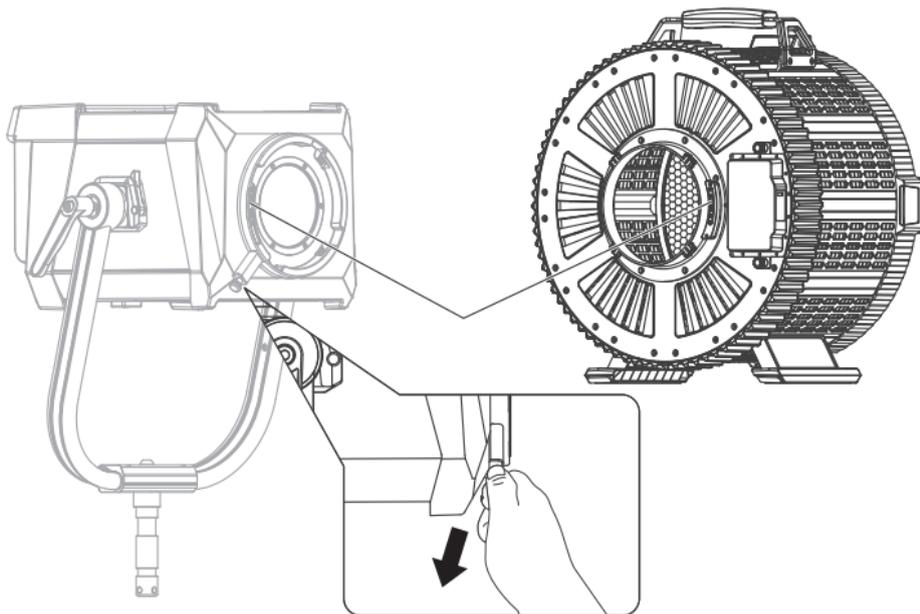

1. To mount the FL-35E on the lamp head, align the electronic contacts on the lens to those on the lamp head and insert, rotate the lens, and click into place.
2. To detach the FL-35E from the lamp head, pull the lock catch of NL mount, and also rotate the FL-35E to remove it from the lamp head.


3. The FL-35E can be switched between motorized and manual modes through the motor box.

Motorized Mode

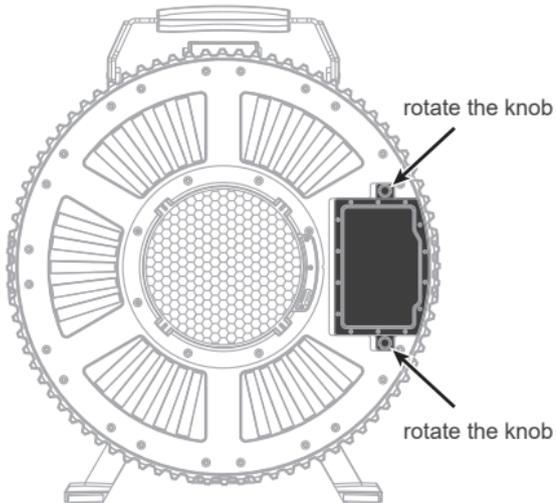


Loosen the two knobs around the motor box and push it to the right, and tighten the knobs to switch to motorized mode.

Manual Mode

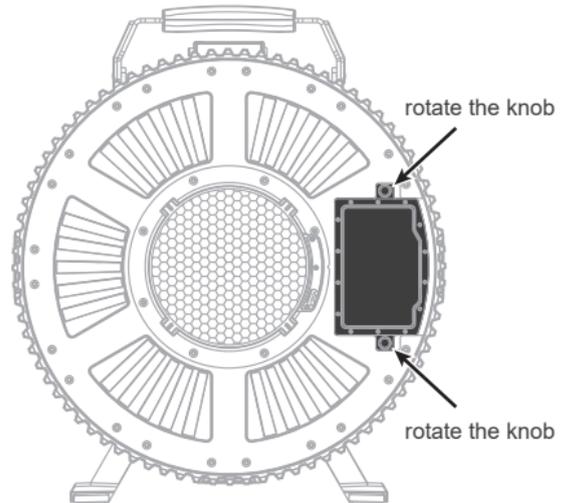


Loosen the two knobs around the motor box and push it to the left, and tighten the knobs to switch to manual mode.

3.1 Motorized Mode

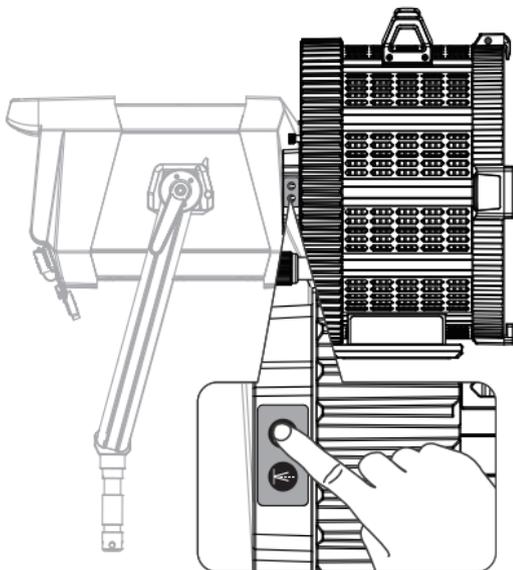


Long press the upper button, the lens will rotate clockwise automatically, and the light will flood.

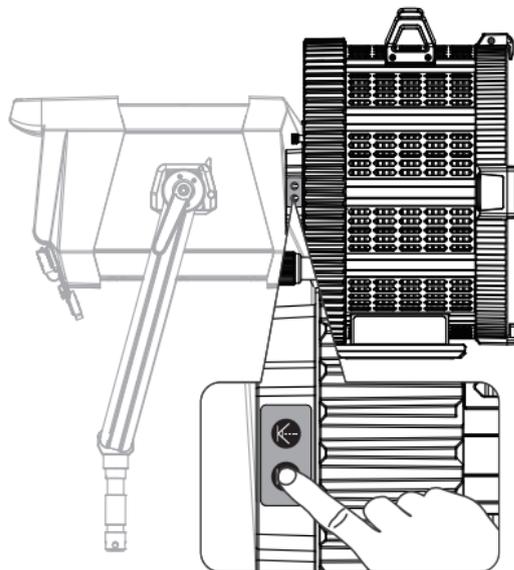


Long press the bottom button, the lens will rotate anticlockwise automatically, and the light will spot.


3.2 Manual Mode

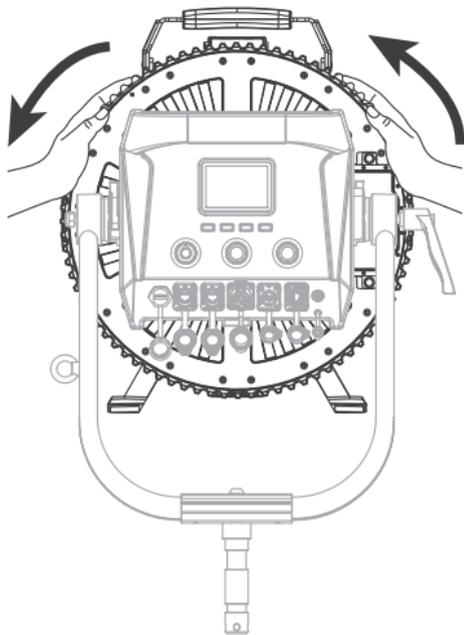


To adjust the lens to spot light, hold the zoom ring of the lens as picture above, and rotate it according to the direction indicated by the arrow.

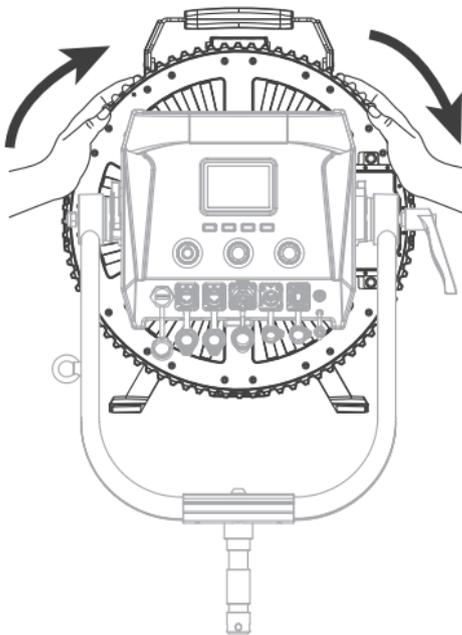

To adjust the lens to flood light, hold the zoom ring of the lens as picture above, and rotate it according to the direction indicated by the arrow.

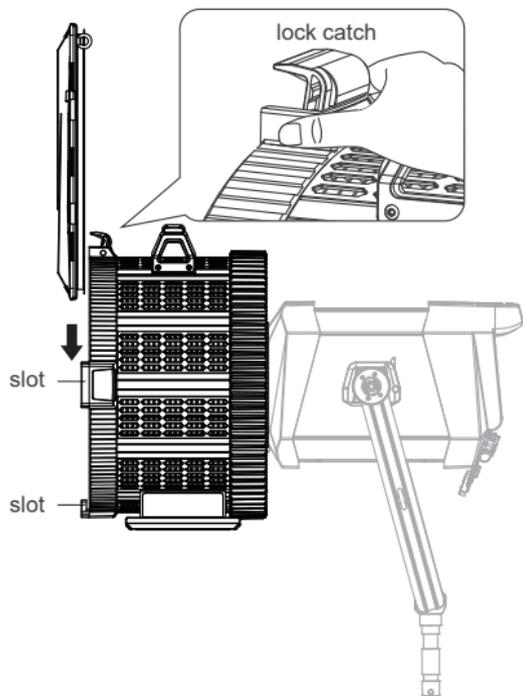

To install the barndoors, press the lock catch on top of the lens to release it, align the barndoors to the slot in front of the lens, insert into the slot from top to bottom, and fasten the lock catch.

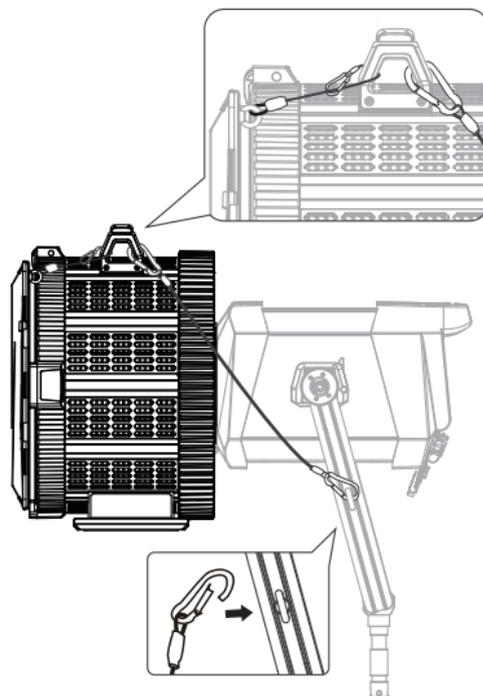

Secure the barndoors to the handle of lens and secure the lens to the eyebolt of yoke with safety cable.

This manual has been compiled according to the rigorous testing for Nanlux products. Product designs are subject to change without prior notice. The latest version of the manual for this product is downloadable at www.nanlux.com.

 +86-754-85751187

 +86-754-85300887

 info@nanlux.com

 Zhanglin,324,Dongli Chenghai Shantou Guangdong China

Guangdong NanGuang Photo&Video Systems Co., Ltd.