



SNIPER 2R™

SKU# SNI550

Fast, precise and powerful the new Sniper 2R™ is a revolutionary new hybrid effects projector, scanner and laser simulator which features new lamp technology, the MSD Platinum 2R Lamp at 132 Watts / 6,000 hours. Capable of producing powerful and precise beam and laser like effects - including liquid sky, laser wave and cones, all moving at speeds never seen before. The main functions include a X / Y scan and Z rotation mirror system, 3 facet rotating prism, variable speed shutter / dimmer / strobe, 14 dichroic colors, 17 static gobos including beam reduction gobos, 5pin DMX and powerCON in/out connections, (4) button control panel, 220W max power consumption, and a multi-voltage universal auto switching power supply (120-240v).

FEATURES

Multi Effect Luminaire, Beam, Scanner, Laser Simulator

132W Phillips™ Platinum 2R Lamp

3° Precision Beam

3 Facet Rotating Prism

Liquid Sky, Laser Wave and Cone Effects

X / Y and Z High-Speed Mirror System

(14) Dichroic Colors + White

(17) Static Gobos



ELATION | SNIPER 2R™ | Product Specification Sheet

Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

FEATURES

Multi Effect Luminaire, Beam, Scanner, Laser Simulator
 3° Precision Beam
 3 Facet Rotating Prism
 X / Y and Z High-Speed Mirror System

SOURCE

132W Platinum 2R Lamp
 6,000 Hour Average Life

PHOTOMETRIC DATA

Measured with 3° Beam Full On
 45,010 LUX 4,181 FC @16.4' (5m)
 12,050 LUX 1,119 FC @32.8' (10m)
 5,633 LUX 523 FC @49.2' (15m)
 3,178 LUX 295 FC @65.6' (20m)
 2,276 LUX 212 FC @82.0' (25m)

EFFECTS

Strobe
 Electronic Dimmer
 3 Facet Rotating Prism
 Multiple Pattern Macros

COLOR

(14) Dichroic Colors + White

GOBOS

(17) Gobos + Open

CONTROL / CONNECTIONS

(3) DMX Channel Modes (14 / 16 / 18)
 4 Button Control Panel
 5pin DMX In/Out
 powerCON In/Out

SIZE / WEIGHT

Length: 14.2" (361mm)
 Width: 12.0" (305mm)
 Vertical Height: 11.6" (295mm)
 Weight: 21.0 lbs. (9.5 kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
 220W Max Power Consumption
 Multiple Unit Power Linking (max 7 @120V / 14 @230V)
 104°F (40°C) Max Ambient Temperature

APPROVALS / RATINGS

CE
 cETLus Pending
 IP20


INSTALLATION

Rigging: Clamps (Not Included)
 Working Position: Any (360°)

INCLUDED ITEMS

(1) Adjustable Mounting Yoke
 (1) powerCON Cable


PHOTOMETRIC DATA

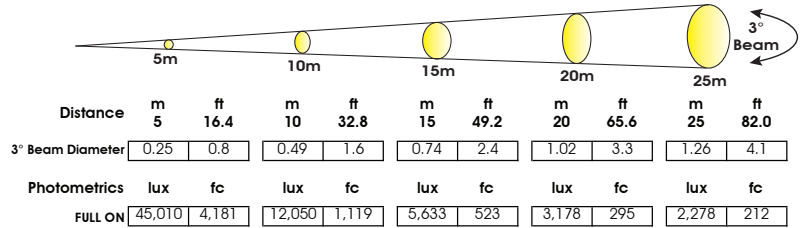

COLORS AND GOBOS



DIMENSIONAL DIAGRAMS

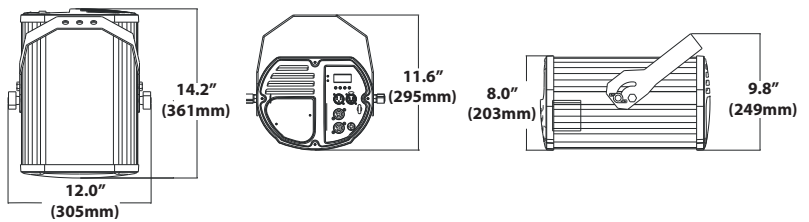

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
** pending **	Road Case For Sniper 2R™
EWDMXSYSTEM	Wireless DMX System (1 Transmitter, 1 Receiver)
EWDMXT	Wireless DMX Transmitter
EWDMXR	Wireless DMX Receiver
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
AC5PDMX10PRO	10 ft. (3m) 5pin PRO DMX Cable
PLC3	3' (1m) PowerCON PRO Link Cable
PLC6	6' (1.8m) PowerCON PRO Link Cable
	Additional cable lengths available.

